

Truvvy Sapphire



Performance Summary:

Heavy-duty 100% Polyester Crypton® Non-PFOA Soil & Stain Protection will hold up to years of use. Enhanced resistance to soil, stains and abrasions for extra durability. Fluid barrier repels liquids. Antimicrobial agent inhibits the growth of microorganisms. Bleach-solution cleanable for easier cleaning.

Fabric Specifications (inches)

| | |
|---------------|---|
| Product #: | KW-10298.6635CAB |
| Color: | Sapphire |
| Content: | 100% Polyester |
| Type: | Woven |
| Finish: | Crypton® Non-PFOA Soil & Stain Protection |
| Backing: | Crypton® Fluid Barrier |
| Weight: | 11.818 oz./sq. yd. +1.0 |
| Width: | 58" |
| Repeat: | Horizontal: 7.438" Vertical: 7.188" |
| Roll Size: | 55 yds. |
| Intended Use: | Healthcare/Hospitality |
| Railroaded: | Nondirectional |

Performance Characteristics

| | |
|------------------------------------|--|
| Abrasion Resistance ASTM D-4157 | 69,000 Double Rubs – Heavy Duty |
| Break Strength ASTM D-5034 | Warp: 333 lbs. min. Fill: 279 lbs. min. |
| Tear Strength ASTM D-2261 | Warp: 44 lbs. min. Fill: 87 lbs. min. |
| Seam Slippage ASTM D-4034 | Warp: 81 lbs. min. Fill: 85 lbs. min. |
| Brush Pilling ASTM D-3511 | Class 4.0 |
| Colorfastness to Light AATCC-16 | 40 Hours – Class 4.0 |
| Crocking AATCC-8 | Dry: Class 5.0 Wet: Class 4.5 |
| Fluid Barrier | Crypton® integrated fluid barrier |
| Antimicrobial | Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface |

Flammability*

| | |
|------------------------|---------|
| CA 117-2013, Section 1 | Passed |
| UFAC | Class 1 |
| NFPA 260 | Class 1 |

Cleaning & Maintenance

| | |
|--------------------|-----------------------------------|
| Cleaning Statement | Spot clean with soap and water |
| Cleaning Code | (W) |

Environmental

| | |
|------------|--|
| GreenGuard | Third-Party GREENGUARD Select Certified |
|------------|--|

Warranty

1 Year

Please order samples prior to purchase – the colors of fabrics on our website may vary slightly compared to the actual product.


* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.



ACT® Registered Certification Marks

Truvvy Meadow

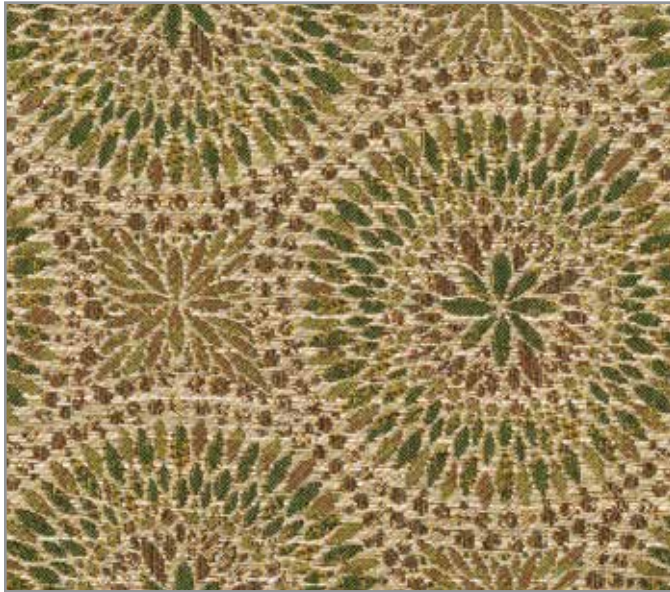

Performance Summary:

Heavy-duty 100% Polyester Crypton® Non-PFOA Soil & Stain Protection will hold up to years of use. Enhanced resistance to soil, stains and abrasions for extra durability. Fluid barrier repels liquids. Antimicrobial agent inhibits the growth of microorganisms. Bleach-solution cleanable for easier cleaning.

Fabric Specifications (inches)

| | |
|---------------|---|
| Product #: | KW-10298.6635CAG |
| Color: | Meadow |
| Content: | 100% Polyester |
| Type: | Woven |
| Finish: | Crypton® Non-PFOA Soil & Stain Protection |
| Backing: | Crypton® Fluid Barrier |
| Weight: | 11.818 oz./sq. yd. +1.0 |
| Width: | 58" |
| Repeat: | Horizontal: 7.438" Vertical: 7.188" |
| Roll Size: | 55 yds. |
| Intended Use: | Healthcare/Hospitality |
| Railroaded: | Nondirectional |

Performance Characteristics

| | |
|------------------------------------|--|
| Abrasion Resistance ASTM D-4157 | 69,000 Double Rubs – Heavy Duty |
| Break Strength ASTM D-5034 | Warp: 333 lbs. min. Fill: 279 lbs. min. |
| Tear Strength ASTM D-2261 | Warp: 44 lbs. min. Fill: 87 lbs. min. |
| Seam Slippage ASTM D-4034 | Warp: 81 lbs. min. Fill: 85 lbs. min. |
| Brush Pilling ASTM D-3511 | Class 4.0 |
| Colorfastness to Light AATCC-16 | 40 Hours – Class 4.0 |
| Crocking AATCC-8 | Dry: Class 5.0 Wet: Class 4.5 |
| Fluid Barrier | Crypton® integrated fluid barrier |
| Antimicrobial | Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface |

Flammability*

| | |
|------------------------|---------|
| CA 117-2013, Section 1 | Passed |
| UFAC | Class 1 |
| NFPA 260 | Class 1 |

Cleaning & Maintenance

| | |
|--------------------|-----------------------------------|
| Cleaning Statement | Spot clean with soap and water |
| Cleaning Code | (W) |

Environmental

| | |
|------------|--|
| GreenGuard | Third-Party GREENGUARD Select Certified |
|------------|--|

Warranty

1 Year

Please order samples prior to purchase – the colors of fabrics on our website may vary slightly compared to the actual product.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.



ACT® Registered Certification Marks

Truvvy Orchard



Performance Summary:

Heavy-duty 100% Polyester Crypton® Non-PFOA Soil & Stain Protection will hold up to years of use. Enhanced resistance to soil, stains and abrasions for extra durability. Fluid barrier repels liquids. Antimicrobial agent inhibits the growth of microorganisms. Bleach-solution cleanable for easier cleaning.

Fabric Specifications (inches)

| | |
|---------------|---|
| Product #: | KW-10298.6635CAP |
| Color: | Orchard |
| Content: | 100% Polyester |
| Type: | Woven |
| Finish: | Crypton® Non-PFOA Soil & Stain Protection |
| Backing: | Crypton® Fluid Barrier |
| Weight: | 11.818 oz./sq. yd. +1.0 |
| Width: | 58" |
| Repeat: | Horizontal: 7.438" Vertical: 7.188" |
| Roll Size: | 55 yds. |
| Intended Use: | Healthcare/Hospitality |
| Railroaded: | Nondirectional |

Performance Characteristics

| | |
|------------------------------------|--|
| Abrasion Resistance ASTM D-4157 | 69,000 Double Rubs – Heavy Duty |
| Break Strength ASTM D-5034 | Warp: 333 lbs. min. Fill: 279 lbs. min. |
| Tear Strength ASTM D-2261 | Warp: 44 lbs. min. Fill: 87 lbs. min. |
| Seam Slippage ASTM D-4034 | Warp: 81 lbs. min. Fill: 85 lbs. min. |
| Brush Pilling ASTM D-3511 | Class 4.0 |
| Colorfastness to Light AATCC-16 | 40 Hours – Class 4.0 |
| Crocking AATCC-8 | Dry: Class 5.0 Wet: Class 4.5 |
| Fluid Barrier | Crypton® integrated fluid barrier |
| Antimicrobial | Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface |

Flammability*

| | |
|------------------------|---------|
| CA 117-2013, Section 1 | Passed |
| UFAC | Class 1 |
| NFPA 260 | Class 1 |

Cleaning & Maintenance

| | |
|--------------------|-----------------------------------|
| Cleaning Statement | Spot clean with soap and water |
| Cleaning Code | (W) |

Environmental

| | |
|------------|--|
| GreenGuard | Third-Party GREENGUARD Select Certified |
|------------|--|

Warranty

1 Year

Please order samples prior to purchase – the colors of fabrics on our website may vary slightly compared to the actual product.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.



ACT® Registered Certification Marks

Truvvy Stargazer



Performance Summary:

Heavy-duty 100% Polyester Crypton® Non-PFOA Soil & Stain Protection will hold up to years of use. Enhanced resistance to soil, stains and abrasions for extra durability. Fluid barrier repels liquids. Antimicrobial agent inhibits the growth of microorganisms. Bleach-solution cleanable for easier cleaning.

Fabric Specifications (inches)

| | |
|---------------|---|
| Product #: | KW-10298.6635CAR |
| Color: | Stargazer |
| Content: | 100% Polyester |
| Type: | Woven |
| Finish: | Crypton® Non-PFOA Soil & Stain Protection |
| Backing: | Crypton® Fluid Barrier |
| Weight: | 11.818 oz./sq. yd. +1.0 |
| Width: | 58" |
| Repeat: | Horizontal: 7.438" Vertical: 7.188" |
| Roll Size: | 55 yds. |
| Intended Use: | Healthcare/Hospitality |
| Railroaded: | Nondirectional |

Performance Characteristics

| | |
|------------------------------------|--|
| Abrasion Resistance ASTM D-4157 | 69,000 Double Rubs – Heavy Duty |
| Break Strength ASTM D-5034 | Warp: 333 lbs. min. Fill: 279 lbs. min. |
| Tear Strength ASTM D-2261 | Warp: 44 lbs. min. Fill: 87 lbs. min. |
| Seam Slippage ASTM D-4034 | Warp: 81 lbs. min. Fill: 85 lbs. min. |
| Brush Pilling ASTM D-3511 | Class 4.0 |
| Colorfastness to Light AATCC-16 | 40 Hours – Class 4.0 |
| Crocking AATCC-8 | Dry: Class 5.0 Wet: Class 4.5 |
| Fluid Barrier | Crypton® integrated fluid barrier |
| Antimicrobial | Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface |

Flammability*

| | |
|------------------------|---------|
| CA 117-2013, Section 1 | Passed |
| UFAC | Class 1 |
| NFPA 260 | Class 1 |

Cleaning & Maintenance

| | |
|--------------------|-----------------------------------|
| Cleaning Statement | Spot clean with soap and water |
| Cleaning Code | (W) |

Environmental

| | |
|------------|--|
| GreenGuard | Third-Party GREENGUARD Select Certified |
|------------|--|

Warranty

1 Year

Please order samples prior to purchase – the colors of fabrics on our website may vary slightly compared to the actual product.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.



ACT® Registered Certification Marks