

Auburndale Bench

Auburndale Bench Dimensions:

Overall Height:	27"	(69 cm)
Overall Depth:	24½"	(62 cm)
Overall Width:	50½"	(128 cm)
Seat Height:	201⁄2"	(52 cm)
Seat Depth:	19"	(48 cm)
Seat Width:	441⁄2"	(113 cm)
Arm Height:	26½"	(67 cm)
Bench Weight:	85 lbs.	(39 kg)
Weight Capacity:	500 lbs.	(227 kg)
COM Details*:	7½ yds.	

Frames:

34" plywood from managed sources. All joints are interlocking and/or glued, screwed and stapled for added strength and rigidity. Exposed wood frame with integrated legs and leg support.

Seat & Back Suspension:

Fully upholstered with a foam covering over a high-tensile-strength steel zig-zag sprung platform.

Seat & Backrest Cushion:


Dacron-wrapped 50 ILD/2.5 density HR poly foam.

Finishing Process:

Sherwin Williams stain, sealer and topcoat. Topcoat consists of a high-solids, pre-catalyzed nitrocellulose lacquer that provides good chemical resistance with the ability to repair small damaged areas in the field.

Finish Options:



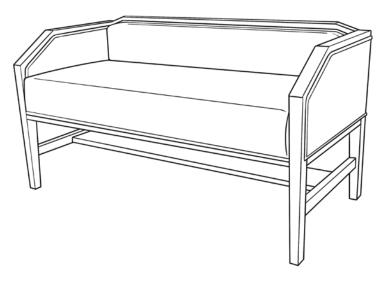

Certifications:

CA117-2013 and CARB II certified. Chair passes BIFMA 5.5X Seating Standards. CA133 is available for an upcharge.

Floor Glides:

Nail-in nylon floor glides.

Customization:

Dual fabrics, contrasting welting and nailhead trim are available for an upcharge.

Warranty Information:

10-year limited warranty on the chair frame, seat foam and backrest foam. Fabric manufacturer's warranty on fabric.

Packaging:

Bench ships upright in a box, wrapped in plastic. Legs are shipped attached.

Fabric requirement for one chair includes the seat and backrest.

The estimated fabric requirement is based on 54W material. The actual amount required may vary depending
on pattern matching, material width or use of multiple fabrics.
* The fabric on the backrest is visible from the rear view of the chair.