

# **Bremerton Bench**

### **Bremerton Bench Dimensions:**

30"	(76 cm)
241/2"	(62 cm)
51"	(130 cm)
20"	(51 cm)
18"	(46 cm)
42"	(107 cm)
26"	(66 cm)
70 lbs.	(32 kg)
500 lbs.	(227 kg)
8½ yds.	
	24½" 51" 20" 18" 42" 26" 70 lbs. 500 lbs.

#### Frames:

34" plywood from managed sources. All joints are interlocking and/or glued, screwed and stapled for added strength and rigidity. Exposed wood frame with integrated legs and leg support.

## Seat & Back Suspension:

Fully upholstered with a foam covering over a high-tensile-strength steel zig-zag sprung platform.

#### Seat & Backrest Cushion:

Dacron-wrapped 50 ILD/2.5 density HR poly foam.

### Finishing Process:

Sherwin Williams stain, sealer and topcoat. Topcoat consists of a high-solids, pre-catalyzed nitrocellulose lacquer that provides good chemical resistance with the ability to repair small damaged areas in the field.

#### **Finish Options:**
















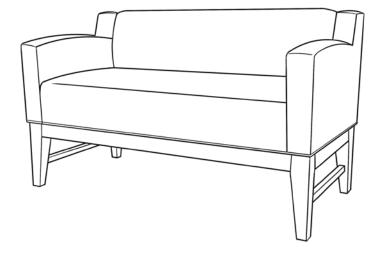

# **Certifications:**

CA117-2013 and CARB II certified. Chair passes BIFMA 5.5X Seating Standards. CA133 is available for an upcharge.

### Floor Glides:

Nail-in nylon floor glides.

## **Customization:**

Dual fabrics, contrasting welting and nailhead trim are available for an upcharge.

# **Warranty Information:**

10-year limited warranty on the chair frame, seat foam and backrest foam. Fabric manufacturer's warranty on fabric.

# Packaging:

Bench ships upright in a box, wrapped in plastic. Legs are shipped attached.

Handcrafted in the USA

Fabric requirement for one chair includes the seat and backrest.

<sup>\*</sup> The fabric on the backrest is visible from the rear view of the chair.

\* The fabric on the backrest is visible from the rear view of the chair.