

#L9952 shown in satin nickel

Pocatello Overbed Light

With a curved, transitional design that can flex to almost any aesthetic, this overbed light is a fan favorite.

Features:


The Pocatello Overbed Light features a contemporary style with decorative metal end caps. The fixture is suited for horizontally mounting on indoor walls in larger spaces. Conveniently integrated pull chain switch operates the nightlight, uplight and downlight to fit resident and staff preferences.

Construction:

The housing is die-formed from 22-gauge steel and includes standard mounting holes and wiring access.

Finish:

Satin Nickel or Oil-Rubbed Bronze end caps.



Diffuser:

The front diffuser is made of 0.10" thick linen acrylic (painted pattern) with a standard white top and bottom acrylic panel.

Electrical:

Input: 120VAC / 60 Hz, 0.7A Max
Not compatible with dimmers.

Certification:

cETLus listed for damp locations and ADA compliant.

LED:

Integrated LED modules are capable of producing a total of 4050 source lumen for 38" or 5400 source lumen for 50" in 3000K CCT. Rated for 50,000 hours and 90 CRI.


Options:

4-Way Pull Switch or Wall Switch (refer to ordering information).

Warranty:

Limited warranty: This fixture is free from defects in materials and workmanship for a period of five years from date of purchase.

Specifications and dimensions subject to change without notice.

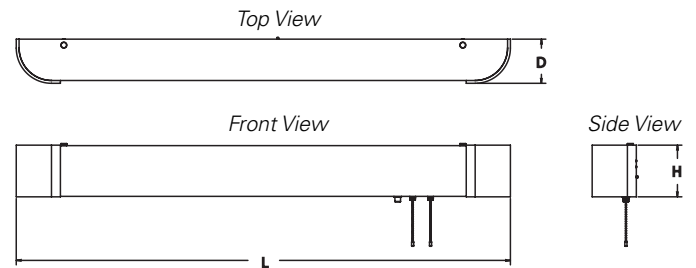


Satin Nickel	LED	Source Lumen	CCT	Features	Dimensions
#L9948	60W	1350 up/2700 down	3000K	4-Way Pull Switch	41½"L x 3¾"D x 4⅞"H
#L9950				Wall Switch	
#L9952	80W	1800 up/3600 down		4-Way Pull Switch	53½"L x 3¾"D x 4⅞"H
#L9954				Wall Switch	



1-800-634-7328 / maxwellthomas.com

Pocatello Overbed Light

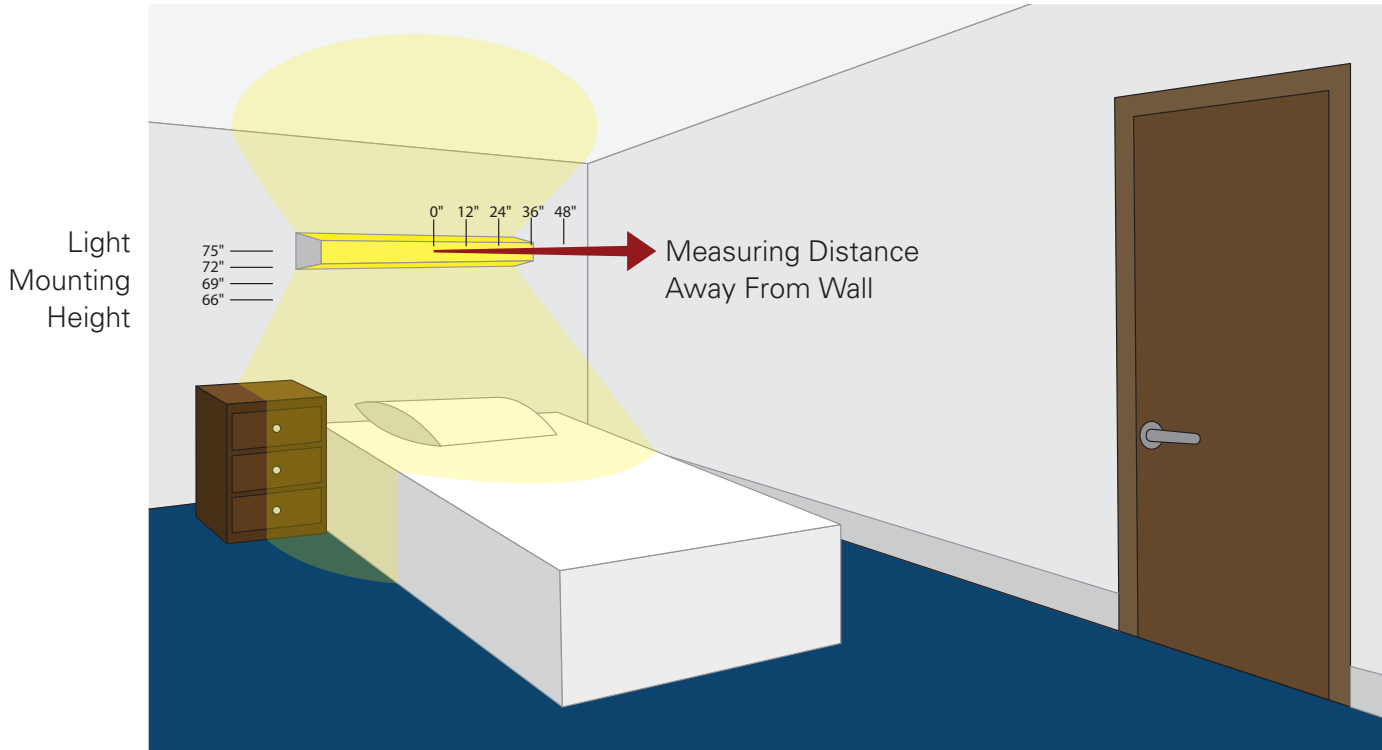

Foot-candles are measured at 66", 69", 72" and 75" heights and 0", 12", 24", 36" and 48" away from the wall. Three measurements at each height and distance are taken for the uplight, downlight and up/downlight combination.

36" Pocatello Overbed Light (UPLIGHT ONLY)

		Measuring Distance				
		0"	12"	24"	36"	48"
Mounting Height	75"	0.47	1.01	1.36	1.45	1.45
	72"	0.48	1.41	1.75	1.88	1.68
	69"	0.53	1.45	1.95	1.98	1.76
	66"	0.58	1.24	2.05	2.02	1.70

48" Pocatello Overbed Light (UPLIGHT ONLY)

		Measuring Distance				
		0"	12"	24"	36"	48"
Mounting Height	75"	0.60	1.46	1.95	2.05	1.94
	72"	0.61	1.90	2.52	2.49	2.28
	69"	0.67	1.83	2.62	2.62	2.34
	66"	0.73	1.68	2.67	2.67	2.33

36" Pocatello Overbed Light (DOWNLIGHT ONLY)

		Measuring Distance				
		0"	12"	24"	36"	48"
Mounting Height	75"	18.32	38.00	44.20	39.80	32.10
	72"	21.40	45.10	44.00	44.00	33.80
	69"	25.20	53.90	47.20	47.20	35.20
	66"	33.30	68.30	52.50	52.50	37.70

48" Pocatello Overbed Light (DOWNLIGHT ONLY)

		Measuring Distance				
		0"	12"	24"	36"	48"
Mounting Height	75"	24.60	50.00	59.40	54.40	44.40
	72"	25.90	56.50	67.10	59.50	47.20
	69"	30.60	70.40	80.00	67.70	52.00
	66"	38.80	83.50	91.60	74.00	55.40

36" Pocatello Overbed Light (UP/DOWNLIGHT COMBO)

		Measuring Distance				
		0"	12"	24"	36"	48"
Mounting Height	75"	18.73	38.10	44.70	40.30	32.60
	72"	21.40	46.30	52.40	45.10	35.00
	69"	26.40	55.10	60.20	49.10	36.80
	66"	32.30	67.80	69.70	54.10	39.20

48" Pocatello Overbed Light (UP/DOWNLIGHT COMBO)

		Measuring Distance				
		0"	12"	24"	36"	48"
Mounting Height	75"	24.50	50.00	59.90	55.40	45.60
	72"	26.40	58.40	68.30	61.20	49.20
	69"	31.00	70.60	80.70	68.30	52.70
	66"	37.20	83.40	91.60	74.30	55.40

Maxwell Thomas

1-800-634-7328 / maxwellthomas.com

DIRECT SUPPLY